




[Home](#) / [Standard products](#) / [Rubber-to-metal elements](#) / [HIL machine bases](#)

For elastic mounting of machines and components

- Material natural rubber, 43°, 57°, 68° Shore A



## 2-hole version

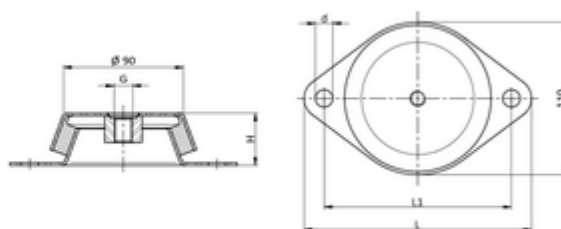

| Art.<br>No. | G       | H    | L    | L1   | d    | Comment           | Flange        |
|-------------|---------|------|------|------|------|-------------------|---------------|
|             |         | [mm] | [mm] | [mm] | [mm] |                   |               |
|             | M10     | 30   | 128  | 110  | 9    | breakaway device  | 2-hole-flange |
|             | M10     | 30   | 128  | 110  | 9    | -                 | 2-hole-flange |
|             | M16x1,5 | 30   | 128  | 110  | 9    | height adjustable | 2-hole-flange |
|             | M12     | 39   | 170  | 140  | 13   | breakaway device  | 2-hole-flange |
|             | M12     | 39   | 170  | 140  | 13   | -                 | 2-hole-flange |
|             | M16     | 39   | 170  | 140  | 13   | -                 | 2-hole-flange |

| Art. No. | G       | H  | L   | L1  | d         | Comment           | Flange        |
|----------|---------|----|-----|-----|-----------|-------------------|---------------|
|          | M16x1,5 | 39 | 170 | 140 | 13        | height adjustable | 2-hole-flange |
|          | M16     | 52 | 216 | 184 | 12,5x14,5 | breakaway device  | 2-hole-flange |
|          | M16     | 52 | 216 | 184 | 12,5x14,5 | -                 | 2-hole-flange |
|          | M20x2   | 52 | 216 | 184 | 12,5x14,5 | height adjustable | 2-hole-flange |

#### 4-hole version

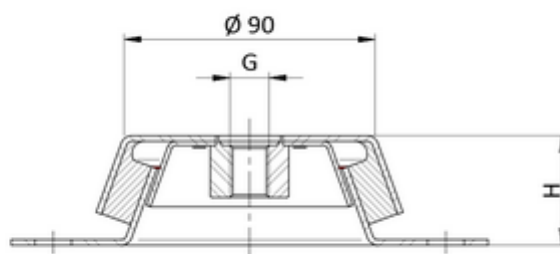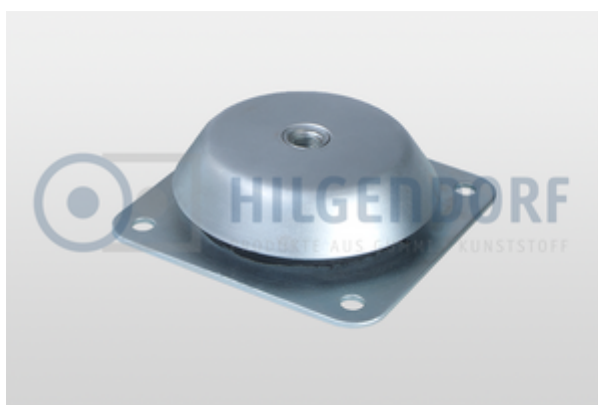


| Art. No. | G     | H    | L    | L1   | d    | Comment           | Flange        |
|----------|-------|------|------|------|------|-------------------|---------------|
|          |       | [mm] | [mm] | [mm] | [mm] |                   |               |
| 0500211  | M16   | 52   | 168  | 132  | 12,5 | breakaway device  | 4-hole-flange |
| 0500187  | M16   | 52   | 168  | 132  | 12,5 | -                 | 4-hole-flange |
| 0500188  | M20x2 | 52   | 168  | 132  | 12   | height adjustable | 4-hole-flange |
| 0500171  | M20   | 63   | 184  | 150  | 13   | breakaway device  | 4-hole-flange |
| 0500174  | M20   | 63   | 184  | 150  | 13   | -                 | 4-hole-flange |
| 0500186  | M20x2 | 63   | 184  | 150  | 13   | height adjustable | 4-hole-flange |

For elastic mounting of machines and components;  
Unevenness in the floor can be balanced out easily;

- Material NBR, 70 ±5 Shore A

- Galvanised steel or stainless steel
- complete with screw, nut and disc

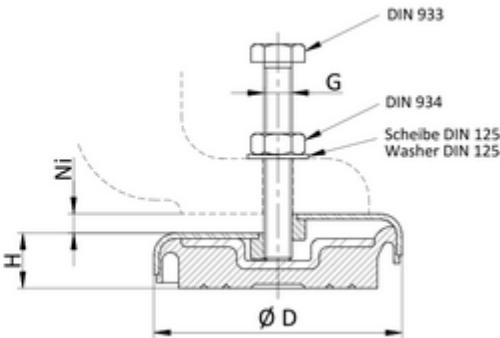

| Art. No.,D,H | Ni   | G    |      |         |
|--------------|------|------|------|---------|
|              | [mm] | [mm] | [mm] | [mm]    |
|              | 80   | 27   | 8    | M10x80  |
|              | 80   | 27   | 8    | M12x80  |
|              | 100  | 37   | 10   | M12x100 |
|              | 120  | 37   | 10   | M12x100 |
|              | 160  | 37   | 10   | M16x120 |
|              | 185  | 45   | 12   | M20x140 |

© 2023 Hilgendorf GmbH + Co. KG • Benzstraße 1 • D-31135 Hildesheim

[+49 \(0\) 5121 / 28995-0](tel:+495121289950)

[E-Mail](#)

## Cookie-Settings

- ☒ Technically essential
- ☐ Statistical purposes (anonymised)

We use cookies on our website. Some of them are technically essential, while others enable us to provide you with a better user-experience. You can consent to the use of cookies for statistical purposes by clicking on „Agree and continue“ or adjust the settings on your own via the options above. For further information and how you can change your decision at any time, please refer to our [data privacy statement](#).

Agree and continue Accept only essential