




[Home](#) / [Standard products](#) / [Rubber hoses](#) / [Push-Lock hose, rubber](#)

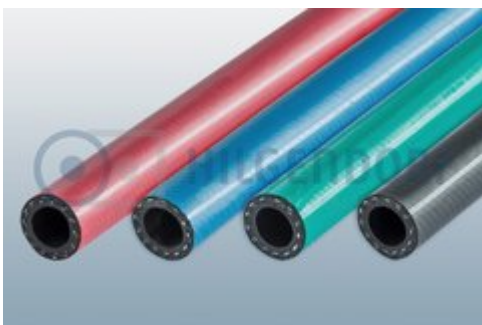

- With textile inlay
- According to drawing 39D 1256
- For conducting air, water and cooling water
- For use without hose clamps
- Temperature range: Air: - 25 to + 75°C
- Temperature range: Water: - 25 to + 95°C
- Free from any substances which can affect paint adhesion (following PV 3.10.7)

[coloured versions are not basically on stock and must be requested specially]

Find out more in our Flyer about the Push-Lock-hose program:



Product sheet Push-Lock
hose and Fittings

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006024	6	16	45	140	40
1006025	10	16	75	170	40
1006026	13	16	90	260	40
1006027	16	16	115	340	40
1006028	20	16	135	420	40

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006029	25	16	165	640	40

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006024-G	6	16	45	140	40
1006025-G	10	16	75	170	40
1006026-G	13	16	90	260	40
1006027-G	16	16	115	340	40
1006028-G	20	16	135	420	40
1006029-G	25	16	165	640	40

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006024-B	6	16	45	140	40
1006025-B	10	16	75	170	40
1006026-B	13	16	90	260	40
1006027-B	16	16	115	340	40

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006028-B	20	16	135	420	40
1006029-B	25	16	165	640	40

Art. No.	DN	Operating pressure [bar]	Bending radius [mm]	Weight [g/m]	Roll length [m]
1006024-R	6	16	45	140	40
1006025-R	10	16	75	170	40
1006026-R	13	16	90	260	40
1006027-R	16	16	115	340	40
1006028-R	20	16	135	420	40
1006029-R	25	16	165	640	40

You will find the corresponding fittings under [hose fittings](#). Please do not hesitate to [contact](#) us if you have any questions.





© 2023 Hilgendorf GmbH + Co. KG • Benzstraße 1 • D-31135 Hildesheim

+49 (0) 5121 / 28995-0

E-Mail

Cookie-Settings

- ☒ Technically essential
- ☐ Statistical purposes (anonymised)

We use cookies on our website. Some of them are technically essential, while others enable us to provide you with a better user-experience. You can consent to the use of cookies for statistical purposes by clicking on „Agree and continue“ or adjust the settings on your own via the options above. For further information and how you can change your decision at any time, please refer to our [data privacy statement](#).

Agree and continue Accept only essential